

Procédés Hallier Collection

◉ LED framing projector 25W

Framing projector

FENYX



A tool at the service of professionals



Made in France

Designer - Manufacturer

www.procedeshallier.fr



Procédés Hallier Collection




LED framing projector 25W

Framing projector

FENYX

Technical data



Power: 25W
 CRI 95 in 3000 K and in 4000 K (R9>90)
 Integrated LED driver
 Voltage In:
 120 to 277 V, AC 50-60Hz
 output current 700mA
 Dimmable from 0% to 100% by manual potentiometer
 3 anti-reflective and anti-static lenses, including 2 ones adjustable by control knob
 Adjustable zoom from 16° to 40° - 360° rotary focal
 4 shutters
 Integrated filter holder
 Integrated Gobo holder (gobo dimensions $\varnothing 37$ mm / 1,2 mm thick max - \varnothing for picture 24mm max)
 Material: Steel
 Finish: Powder painted Black, White or Grey - other colors on request
 LED luminous flux*: 2464 lm to 2567 lm

* LED measurement source


Options

External LED driver
 DALI LED driver
 DMX LED driver
 BLUETOOTH controlled by iPhone, computer or dimmable bluetooth power switch ENOCEAN
 Wideflood beam ($\varnothing 135$ cm at 1 m / $\varnothing 220$ cm at 2 m / $\varnothing 470$ cm at 3 m)

Installation

Single circuit track adaptor
 3-circuit track adaptor
 Backplate
 Other options available on request (clamp, ...)

Dimensions (mm)

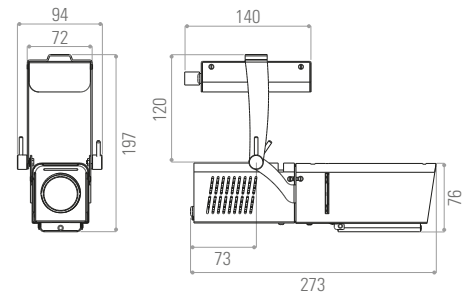

Photometry

FENYX 4000 K 25W 700 mA CRI 95

Distance (m)	Beam Diameter (cm)	Lux
1	$\varnothing 40$	10950
2	$\varnothing 80$	3000
3	$\varnothing 120$	1320

Measures taken from right in the front of the spotlight



Made in France

Factory & Head office : 69, rue Victor Hugo 93100 MONTREUIL - FRANCE
 Tel. +33 (0)1 48 51 79 88 • contact@procedeshallier.fr

